


Snorkel AB60J


Plation

Machine Dimensions

Stowed Length29'2" (8.9 m)
Stowed Height8'3" (2.5 m)
Wheelbase8' (2.44 m)
Width7'11 1/2" (2.4 m)
Ground Clearance12" (30 cm)
Weight24,800 lbs (11,249 kg)
Tire Size15" x 19 1/2" (38 cm x 50 cm)

Reformance

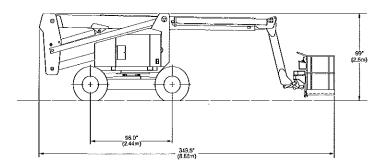

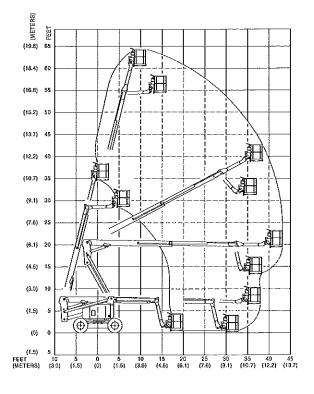

Standard Features

- 360 degree continuous turntable rotation
- · Proportional drive, lift & swing
- Engine anti-restart
- · Tie down lugs
- 170 degree hydraulic Platform rotation
- 12 volt emergency operated power
- Manual bleed down valve
- · Foam filled tires

- · Hydraulic oil level/temp gauges
- Driveable at full height
- Tilt alarm
- 125 volt GFCI AC outlet
- Aluminum upper booms
- Hour meter
- High engine temp/low oil pressure shut down
- Lifting lugs
- Four wheel drive

Options

- Operator Horn
- Platform control box cover
- Flashing light on boom
- Swinging gate
- Sandblast protection kit
- Driving lights
- Dual Fuel
- · Platform work lights
- Two wheel drive option deduct

- · Spark arrestor muffler
- Cold weather start kit
- AC Generator
- Drive motion alarm
- Tow kit
- Platform 92" x 30"
 (234 x 76 cm) Aluminum
- Platform 60" x 30"
 (152 x 76 cm) Aluminum

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Acrial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Manufacturing Plant

2009 Roseport Road Elwood, Kansas 66024 800-255-0317 785-989-3000 Australia 26 Redfern Road Wetheril Park NSW 2164 Australia (02) 9725 4000