

Snorkel Snorkelift® TB 60

Designed for maximum operator convenience and comfort, these machines feature smooth, precise controls, exceptional versatility and proven reliability.



SPECIFICATIONS



Working Height	66'	20.1 m
Platform		
Height	60'	18.3 m
Capacity	500 lbs.	227 kg
Size	60" x 30"	152 x 76 cm
Construction	Steel	
Boom Construction		
Base Boom	Steel	
Telescoping Booms	High strength aluminum	
Boom Extension	Double acting hydraulic cylinder and dual wire rope cables	
Boom Guides	Lubrication free, ultra high molecular weight polyethylene	
Pivot Pin Bearings	Lubrication free, composite material	
Horizontal Reach	50'	15.2 m
Elevation	+72°/-16°	
Hose & Wiring Extension	Telescoping housing attached to sides of booms	
Turntable Rotation	360° continuous	
Power Source	Gas (LP or Dual Fuel optional) or Diesel Engine	
Fuel Capacity	40 US gal.	151.4 L
Hydraulic System Capacity	35 US gal.	132.5 L
Maximum Drive Speeds		
Booms Stowed	3 mph	4.8 kph
Booms Elevated	1 mph	1.6 kph
Gradeability		25%
Turning Radius (Inside)	15' 5"	4.7 m
Stowed Height	8' 9"	2.7 m
Width	8' 1/2"	2.5 m
Stowed Length	30' 10"	9.4 m
Wheel Base	10'	3.1 m
Tires		15 x 19.5
Type	Foam filled, 12 ply rating	
Weight (approx.)	20,700 lbs	9,389 kg

- Fully proportional ramp-on controls for boom lift, swing, and drive
- Rheostat control at ground for boom and platform functions
- Automatic braking
- Printed circuit board with on-board LED diagnostics
- Foam filled tires
- 180° hydraulic platform rotation
- 12 volt battery operated emergency power
- Manual bleed down valve
- Driveable at full height
- 5° tilt alarm
- 125 volt GFCI AC outlet at platform
- Aluminum upper booms
- Hour meter and ammeter
- Engine anti-restart control
- Hydraulic oil level and temperature gauges
- High engine temperature and low oil pressure shut-down system
- Keyed master switch
- 60 month warranty

Snorkel Snorkelift® TB 60 Telescoping Boom

Optional Equipment

- Operator horn
- Platform control box cover
- Platform work lights
- Airline to platform
- Flashing light on boom
- Swinging gate
- Sandblast protection kit
- Driving lights
- Dual fuel or LP gas only
- Spark arrestor muffler
- Cold weather start kit
- Hydraulic system cold weather warm-up kit
- AC generator (hydraulic powered)
- Drive motion alarm
- Tow kit
- Lifting lugs
- Four wheel drive
- Platform options
 - 92" x 30" (234 x 76 cm) Steel
(Capacity 500 lbs., 227 kg)
 - 60" x 30" (152 x 76 cm) Alum.
(Capacity 660 lbs., 300 kg)
 - 92" x 30" (234 x 76 cm) Alum.
(Capacity 600 lbs., 273 kg)

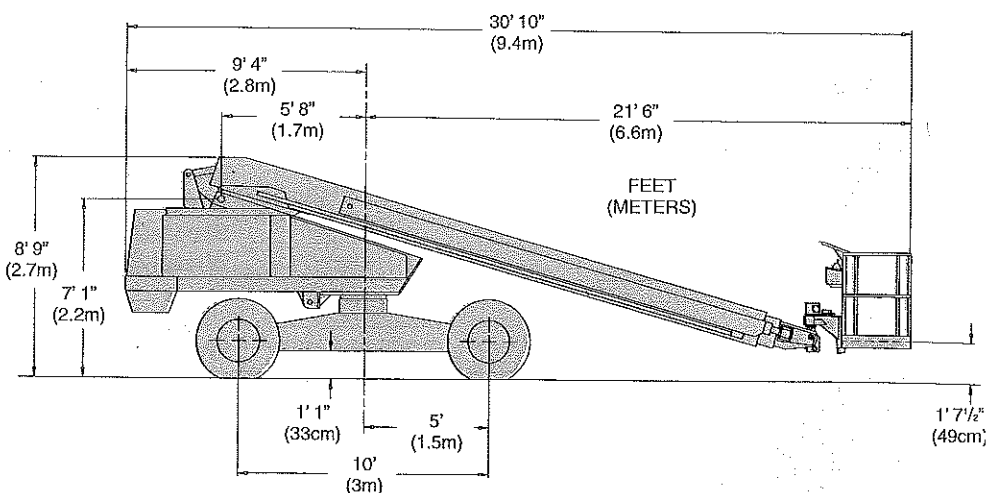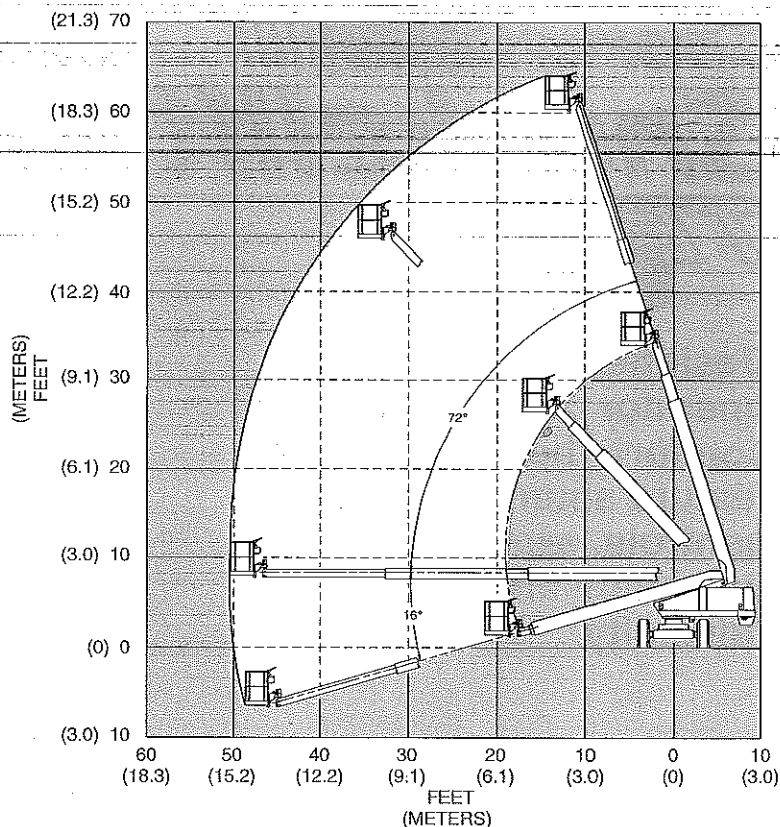

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform.

Aerial work platforms must be elevated only on firm, level surface.

Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel
An OmniQuip Company



P.O. Box 1160
St. Joseph, MO 64502-1160
Phone: (816) 364-0317
Fax: (816) 364-0380
www.snorkelusa.com

Printed in U.S.A.
TB 60 1/98